

POWER

CSU Series 1800W - 2400W 12V Distributed Power System

Preliminary Data Sheet

Front-end Bulk Power

Total Output Power: 1800W,
2000W, 2400 W

Input Voltage: 90 to 127, 180-264
Vac, 240Vdc

SPECIAL FEATURES

- Ultra-high density
- 1U power supply
- Active power factor correction
- EN61000-3-2 Harmonic compliance
- Inrush current control
- 80PLUS® Platinum efficiency
- N+N, N+1 redundant
- Hot-pluggable
- Active current sharing
- PMBus® compliant
- Closed loop throttle
- Cold redundancy
- Two-year warranty

COMPLIANCE

- Conducted/Radiated EMI Class A Limits
- RoHS
- IEC 60950/62368

SAFETY

- UL/cUL
- CB Test Certificate
- CE Mark
- KC
- EAC
- BIS
- CQC
- BSMI



Electrical Specifications


Input							
Input Range and Output Power		CSU1800AP	CSU2000AP	CSU2400AP			
90-127 Vac		1000W	1400W ¹	N/A			
180-264 Vac		1800W	2000W ²	2400W			
Frequency		47 Hz to 63 Hz					
Efficiency		94.0% peak, platinum efficiency rating					
Max input current		100/200Vac	11.3A/10A	C14 14.4A/10A	13.8A		
Inrush current		35 Apk, cold start					
Conducted EMI		Class A					
Radiated EMI		Class A					
Power factor		>0.9 beginning at 10% load					
Hold-up time		11 ms at full load					
Leakage current		<0.585 mA					
Output							
		Main DC Output			Standby DC Output		
		MIN	NOM	MAX	MIN	NOM	MAX
Nominal setting		-0.20%	12.2V	0.20%	-3.5%	12.0	+3.5%
Total output regulation range		-5%		+5%	-5%		+5%
Dynamic load regulation range		-5%		+5%	-5%		+5%
Output ripple				1%			1%
Output current	CSU1800AP	1.0 A ³		147.5	0.1 A		3.5 A
	CSU2000AP			163.9			
	CSU2400AP			196.7			
Current sharing		Within ±6% of full load rating, starting at 25% of PSU rated load			N/A		
Capacitive loading		2,000		50,000	10		3,100
Output rise time		10 ms		70 ms	10 ms		70 ms

¹ Output power limited at 1400W at 120Vac; linearly derated to 1250W at 100Vac.

² CSU2000AP-3-200/201 only. CSU2000AP-3-100/101 output power rating limited by 10A input current.

³ Minimum current for transient load response testing only. Unit is designed to operate and be within output regulation range at zero load.

Mechanical Outline CSU1800AP-3-100/101 and CSU2000AP-3-100/-101

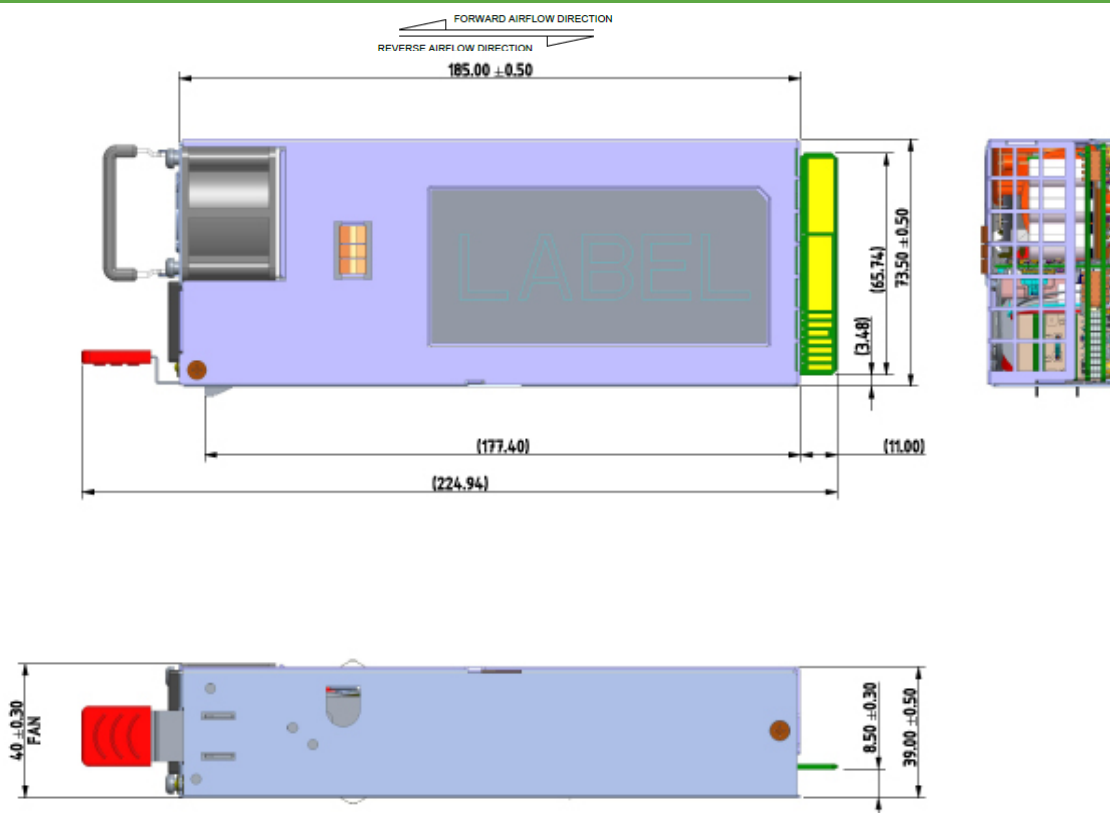


Environmental Specifications

Operating temperature	Forward Airflow	CSU1800AP-3-100/CSU2000AP-3-100/CSU2000AP-3-200: -5 to 55°C full rated power Allowable up to TBD °C for short term operation
	Reverse Airflow	Continuous maximum 40°C, allowable up to 50°C for short term duration
Operating altitude		Up to 10,000 feet ¹
Operating relative humidity		+5% to 95%, non-condensing
Non-operating temperature		-40 to +70 °C
Shipping and storage relative humidity		+5% to 95%, non-condensing
Non-operating altitude		Up to 50,000 feet
Vibration and shock		Standard operating/non-operating random shock and vibration
RoHS compliance		Yes
MTBF		500 k hours at 50 °C, 85% load, nominal input
Operating life		Minimum of 5 years at 50°C, 85% load, nominal input

¹ Safety creepage/clearance rated for 5,000m altitude for CQC

Mechanical Outline CSU2000AP-3-200/201 and CSU2400AP-3-100/101

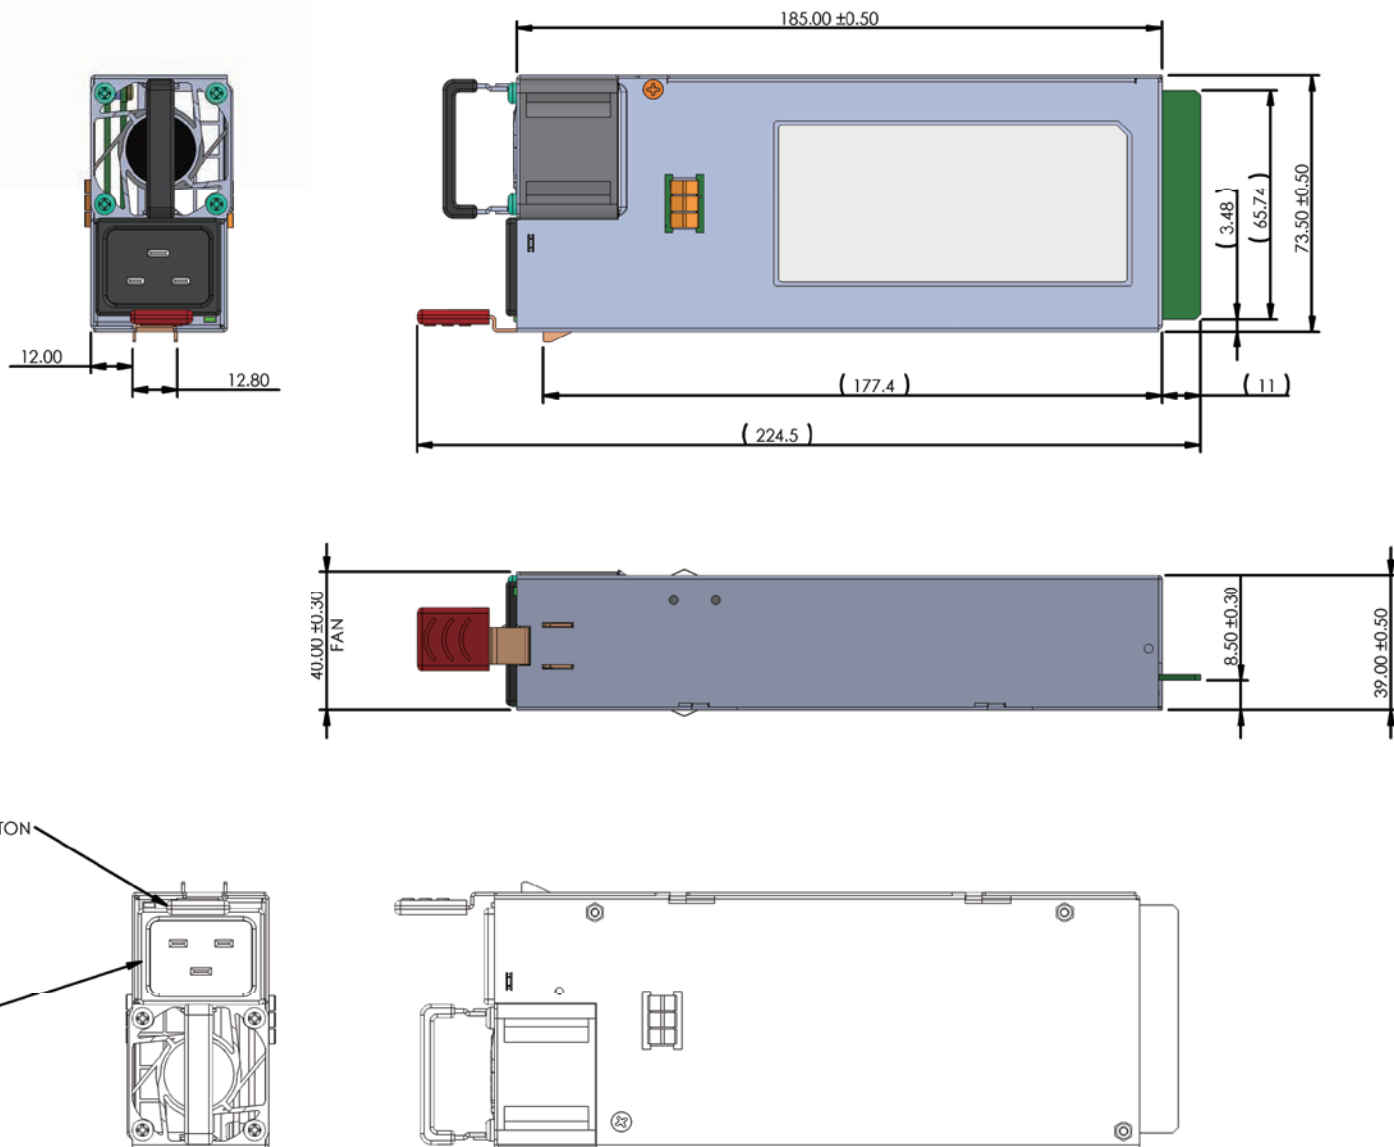

Model Number	Description	Outputs		Airflow Direction
CSU1800AP-3-100	1U x 73.5 x 185mm 1800W, Platinum efficiency, red, C14	12.2V/147.5A	12.0V/3.5A	Forward
CSU2000AP-3-100	1U x 73.5 x 185mm 2000W, Platinum efficiency, red, C14	12.2V/163.9A	12.0V/3.5A	Forward
CSU2000AP-3-200	1U x 73.5 x 185mm 2000W, Platinum efficiency, red, C20	12.2V/163.9A	12.0V/3.5A	Forward
CSU2400AP-3-100	1U x 73.5 x 185mm 2400W, Platinum efficiency, red, C20	12.2V/196.7A	12.0V/3.5A	Forward


Connector Definition

Output connector part number	Card-edge
Recommended mating connector part number	FCI Amphenol 10035388*
	FCI Amphenol GPCEFX361411HHR (CSU1800AP-3-xxx and CSU2000AP-3-xxx)
	FCI Amphenol 10147875-001LF (CSU2400AP-3-xxx)

* Use with caution to maintain connector temperature rise and connector temperature

Output Connector Pin Configuration

A1-A9	POWER GND	B1-B9	POWER GND
A10-18	+12V	B10-B18	+12V
A19	SDA	B19	A0 (addressing)
A20	SCL	B20	A1 (addressing)
A21	PSOEN#	B21	12VSB
A22	SMBAlert#	B22	CR_BUS
A23	RETURN_SENSE	B23	ISHARE
A24	+12V_REMOTE_SENSE	B24	GND (used by system for presence detect)
A25	PWOK	B25	RESERVED

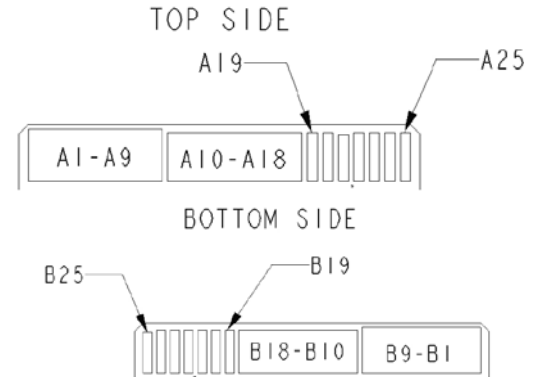

Addressing

PMBUS				IPMI FRU			
A1	A0	Read Address	Write Address	A1	A0	Read Address	Write Address
0	0	B0h	B1h	0	0	A0h	A1h
0	1	B2h	B3h	0	1	A2h	A3h
1	0	B4h	B5h	1	0	A4h	A5h
1	1	B6h	B7h	1	1	A6h	A7h

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com